



PRODUCT CODE PO 7070 DE



PIZZA OVEN USER MANUAL



CONTENTS

PAGE NO	ISSUES
1	COVER
2	CONTENTS
3	PRESENTATION
4	TECHNICIAL SPECIFICATIONS
5	ELECTRIC SCHEME
6	OVERALL DIMENSIONS
7	WARNING SIGNS
8	PRODUCT LABEL INFORMATION
9	SECURITY DETAILS
10	HANDLING AND RELOCATION
11-12	USING THE DEVICE, CLEANING AND MAINTENANCE
13	WARRANTY CONDITIONS
14	EXPLODED PICTURE
15	PARTS LIST
16	CE DECLARATION

PRESENTATION

Hi there,

We thank you for your confidence in choosing our device and our company. Our devices are used in 60 countries around the industrial kitchen with you . Our device is manufactured in accordance with international standards.

To receive output from the device to your expectations, and certainly you read the manual to use long-term, we strongly advise users to your instructor. Before calling our service, we ask you to consider the following points.


SGS OVEN

- Please read the manual carefully before using your hand and using the device, to allow the reading of using the device. When you run manual reading device from the machine will be out of warranty.
- Purchase and installation of our product you received, giving information about the use and care manual in accordance with the laws and regulations of the electrical installation shoul be read carefully. Device connection way qualified personnel of our authorized service personnel to ensure good preparation before for installation.
- Nearest to you and you do not understand the issues hesitated You want information from an authorized phone service.
- If the stand of costs and service personnel called for Assembly Keep in mi every hour waiting fee will be billed to you.


We hope that you get the most out of our product ...

TECHNICIAL SPECIFICATIONS

		T	
TECHNICIAL SPECIFICATIONS	PO 7070 DE	PO 7070 DE (FULL STONE)	
TOTAL ELECTRIC POWER (KW)	12	12	
My mains supply voltage (V AC)	380/400	380/400	
OPERATING FREQUENCY (Hz .)	50 / 60	50 / 60	
RATED CURRENT (A)	32	32	
POWER CORD (number of vessels x mm)	5 x 4	5 x 4	
MaxM . OPERATING TEMPERATURE (°C)	150-500	150-500	
COOKING SURFACE	FIRECLAY STONE	FIRECLAY STONE	
THERMOSTAT OPERATING RANGE (° C)	70-500	70-500	
THERMOSTAT OPERATING RANGE (° C)	104X99X76	104X99X76	
MAX SLOPE	5°	5°	
CLASS	1	1	
PROTECTION CLASS	IP 20	IP 20	
WORK BENCH HEIGHT (MM)	92x102x90	92x102x90	

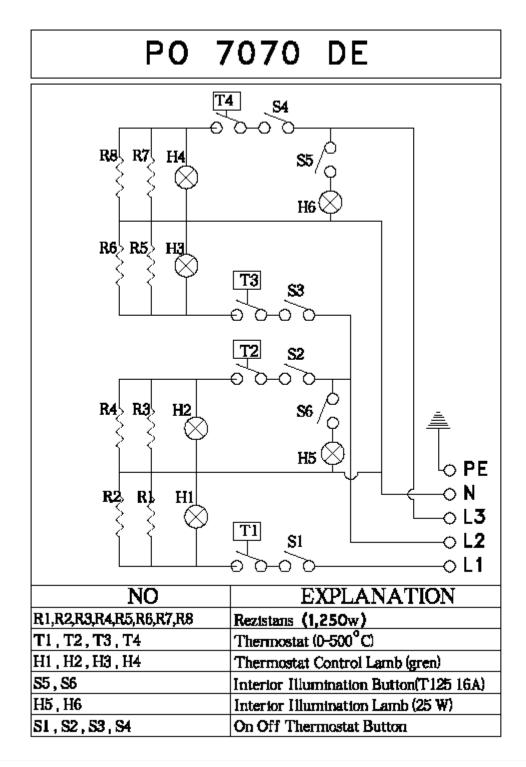

OVERALL DIMENSIONS

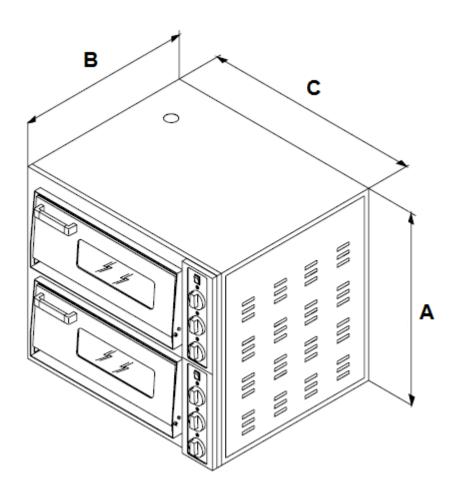

Kod	Capacity	External Dimensions (cm)	Interior Dimensions (cm)	Power	Weight (Kg)
PO 7070 DE	4 Adet Ø34 cm	104x99x76	70x70x15	12 kw 400V 50/60Hz.	150
PO 7070 DE (full stone)	4 Adet Ø34 cm	104x99x76	70x70x15	12 kw 400V 50/60Hz.	180



PROTECTION GROUNDING



PE

GROUNDING NETWORK



ELECTRICITY



HIGH TEMPERATURE

ELECTRICAL CONNECTION VALUES

380-400 V~ NPE / 50- 60 Hz

Voltage: 380 V - 380 V Network Connection: 3 FNPE Terrestrial


Trunked Frequency: 50 Hz -60.

ELEKTRİKLİ PİZZA FIRINI / PIZZA OVEN			
		0232) 257 52 23-33 0232) 257 53 03	
MÖDEL (Type)	TARIH (Date)		
PO 7070	07.2019		
SERİ NÖ (Serlal)	AĞIRLIK (Welght)		
21574	150 Kg		
GÜÇ (Power)	VOLTAJ / (V eltage)	CONNECTING TABLE	
12 KW	400 V 3F + N	BROWN L1	
FREKA NS (Frequency)	IP	BLACK L2	
50-60 Hz	20	GREY L3	
AKIM / (Courrent)	SINIF (Class)	BLUE N	
32 A	1	YELLOW/GREEN -	
SGS MUTFAK EKIPMANLARI LTD.ŞTİ / MADE IN TURKEY			
Cumhuriyet Mah Balkan Cad.No	20 Yazıbaşı/TORBALI/İZI	IR info@sgsoven.com	

ELEKTRİKLİ PİZZA FIRINI/PIZZA OVEN				
		TEL 1+90 (0232) 257 52 23-33 FAX:+90 (0232) 257 53 03		
MODEL (Type) PO 7070 FULL STONE	TARÍH (Date) 08.2019		(•
SERİ NO (Serlal) 21276	AĞIRLIK (Welght) 180Kg)	•
GÜÇ (Power)	VOLTA	J / (V eltage)	CONNECTING TA	\BLE
12 KW	400 \	V 3F + N	BROWN	L1
FREKA NS (Frequency)	IP		BLACK	L2
50-60 Hz	20		GREY	L3
AKIM / (Courrent)	SINIF	(Class)	BLUE	N
32 A	1		YELLOW/GREEN	ㅗㅣ
SGS MUTFAK EKIPMANLARI LTD.ŞTİ / MADE IN TURKEY				
Cumhuriyet Mah.Balkan Cad.No	20 Yazıba	şı/TORBALI/İ zm	R info@sgsover	

SAFETY WITH DETAILS

- The device should never be operated under the hood.
- All types of solid and liquid combustible material in the background of the device (Clothing, alcohol and derivatives, petro
- chemical products, wood and plastic supplies , curtains etc.) Should not be taken .



- This device must be installed in accordance with current regulations and should be used only in a well -ventilated area. Refer to the device 's facility and instructions before use.
- The device should be used only by employees who have received training about the device is made for industrial use.
- The area in which the device is used without any reason to panic in case of fire flames flare (if any) to use the fire extinguishers closing the gas valve and power switch. Never use water to extinguish the flames.
- ✓A wall of the device compartment, kitchen furniture to be positioned close to the decorative covering VB.N if their coating is made from fireproof material, or a suitable non-combustible heatinsulating material the distance of 5 cm, otherwise must be at least 20 cm. It is recommended attention to obey the rules of fire protection.
- Set the device to be placed under the bench and set foot on the plane of the device operation should be in balance.
- Electrical connection of the device must be checked by a qualified electrician, floor max. 170 cm in height must be connected to insurance.
- Electrical connection; To supply insurance against danger of leakage current of 30 mA leakage current should be done like putting insurance.
- Nearest grounding bar connected to the grounding of the electrical wiring of the device must be provided on board.














HANDLING AND DISPLACEMENT

- The device must be placed on pallets vertically by manpower.
- The device must be placed on pallets vertically by manpower.
- Transport should be far from the case of slow motion, if necessary, the device must be fixed to the pallet must be protected against the swings or the balance by one person.
- · Hit a place moving the product, and do not drop .
- Electrical connection of the device must be checked by a qualified electrician should connect the fuse on the ground from a height of 1800 mm ..
- Nearest grounding grounding bar connected to the socket on the panel that will be used must be provided. 32 auto insurance for a single model should be used in the billboard.

ATTENTION!: APPLIANCE NEVER OPERATE from your GROUND CONNECTING LINE

CONTROL BOARD

Control Board,
A.TOP FLOOR THERMOSTAT
B.TOP CAT BACKING THERMOSTAT
C.TOP FLOOR (ON OFF)
D.LOWERSOLID TOP HEATER THERMOSTAT
E. LOWER SOLID BASE HEATER THERMOSTAT
F. LOWER FLOOR Pako SARTEL (ON OFF)

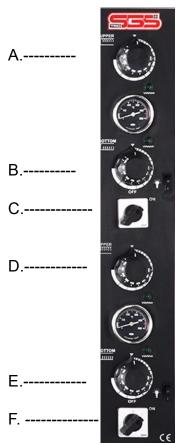

USING THE DEVICE

NOTE: Do not go beyond the intended use. Knowing the machine safety and technical requirements and should be used by someone who read the user guide

- 1. In the device before first use, the outer surface dipped in warm soapy water, cleaned with a cloth wrung.
- 2. Open the on-off switch
- 3. Thermostat (250 ° C-300 ° C) set. (Green light will illuminate).
- 4. Products originating from a smell can occur the first time you run the insulation and the heating element. Therefore, all run before starting to use the thermostat to $250\,^{\circ}$ C for $45\,^{\circ}$ minutes to bring the product as hollow.
- 5. Place the pizza to be cooked after the flashing green light
- 6. Pizza cooking time is about 7-8 min at about 280 ° C.
- 7. You can check if cooked and cooked pizzas with key means burning lamp.
- 8. Do not open the lid after cooking pizzas and get pizza. Close the lid again.
- 9. Although cutting the power to the furnace in order to save on a short waiting time during use, the thermostat take hold, bringing to $90\,^{\circ}$ C. (If the oven's power is cut off due to the cold to go to a sufficient temperature for the next cooking process will result in a loss of time and energy.)
- 10. Turn off the power switch after daily use. Do the cleaning of the device after a power loss.
- 11. The device in temperatures between + 5 ° C to +40 ° C and operated at a maximum humidity of 65% is recommended that ambient conditions.

CLEANING AND MAINTENANCE

PERIODIC MAINTENANCE AND CLEANING

Consumers must be made by :

- 1. Make the power connection of your oven cleaning after discontinuation.
- 2. Allow to cool in the oven for cleaning.
- 3. Before and after each use, check the inside of your oven, never leave any material in the furnace.
- 4. Clean solid waste that may remain from the baked goods in the oven.
- 5. Wipe the inside of your oven dipped in warm soapy water with a cloth wrung.
- 6. Then again, wipe with a damp cloth and dry.
- 7 of the approved cleaning materials can be used in the oven, take care to leave the interior remains. Please note that evaporated with the heat generated during use of substances can penetrate the food.
- 8. Sight Glass can be removed without leaving any residue with glass cleaning products.
- 9 will not damage the metal structure used for exterior surfaces without leaving residue grainy industrial cleaning supplies.
- 10. Cleaning during spirit of salt, bleach, dust removal equipment, metal corrosive chemicals (CHEMICALS CLEANING MATERIALS) Do not use the cleaning material.

THE LIFE DEVICES:

. When using the recommended conditions, the lifetime of the device 10 years

Maintenance;

Periodic maintenance, performed by technical elements relative to the frequency of use gerekmektedir. Device max. We recommend making a maintenance every 6 months. although in the warranty period, subject to maintenance by our authorized service charge element of the device

USING THE DEVICE





ATTENTION! : As described in the device 's installation and use Care should be taken to be installed and operated . Any failure When faced with the situation of our nearest authorized service Let me know. When EQUIPMENT FAILURE RESPONSE ONLY POWERS AUTHORIZED SERVICE these. Authorized Service of EXCEPT FOR A TECHNICAL STAFF MEMBER OR incompetent THE UNIT INTERVENTION


DEVICE WARRANTY WILL REMAIN OUTSIDE.

SO THE UNAUTHORIZED PERSONS ABSOLUTELY NOT ALLOW THE DEVICE DO NOT INTERVENE. THESE CONDITIONS SHALL BE LIABLE FOR ANY WAY MANUFACTURING COMPANY. Our AUTHORIZED SERVICE DURING SERVICE ORIGINAL SPARE PARTS WITHOUT ANY REASON OFFER CAN NOT USE. IN ANY WAY THIS IS NOT THE ORIGINAL EQUIPMENT FITTED WITH PARTS DEVICE WARRANTY EXCLUDES.





- 1) The warranty period starts from the date of delivery and 2 years.
- 2) The goods are under guarantee of our firm, including all parts. (Except stone and glass)
- 3) In case of defects within the warranty period, it added to the warranty period repair. The repair time is up to 20 business days. This period starts on the failure of the service station, in the absence of the service station, the property dealer, distributor, agent, representative, importer or manufacturer will start from the date of the notification from one-producers. Consumers malfunction notification by phone, fax, e-mail, not registered mail return receipt or similar means possible. However, the burden of proof belongs to the customer in case of dispute. Defection until the completion of the repair of the goods manufacturer-producer or importer can not be eliminated within 10 days, have to be allocated to the use of other consumer goods have similar characteristics.
- 4) Materials and labor needed within the warranty period, as well as in case of failure due to installation errors, labor costs, the cost of parts replaced or under any other name without demanding any fee will be repaired.
- 5) Although we use the right consumer goods repair; from the date of delivery to engaging in, as to stay within the warranty period, in a year; at least four times or manufacturer-producer and / or failed six times in addition to the warranty period set by importers, perpetuate the inability to take advantage of these faults malt, Exceeding the maximum time required for -Tamir, The -Company mania service station, service station order seller in the absence of, dealer, agency representatives importer or repairing the reporting malfunctions to edit one of the manufacturers and producers to determine whether a possible case of consumer goods free of alteration, refund or shame rate may demand a price reduction.
- 6) Failure resulting in the use contrary to the instructions for use of the goods are out of warranty issues.
- 7) For problems that may arise in connection with a guarantee certificate of the Ministry of Industry and Trade , and Consumer Protection of Competition may apply to the General Directorate .
- 8-) Errors that may occur from electric high voltage remains outside the warranty.

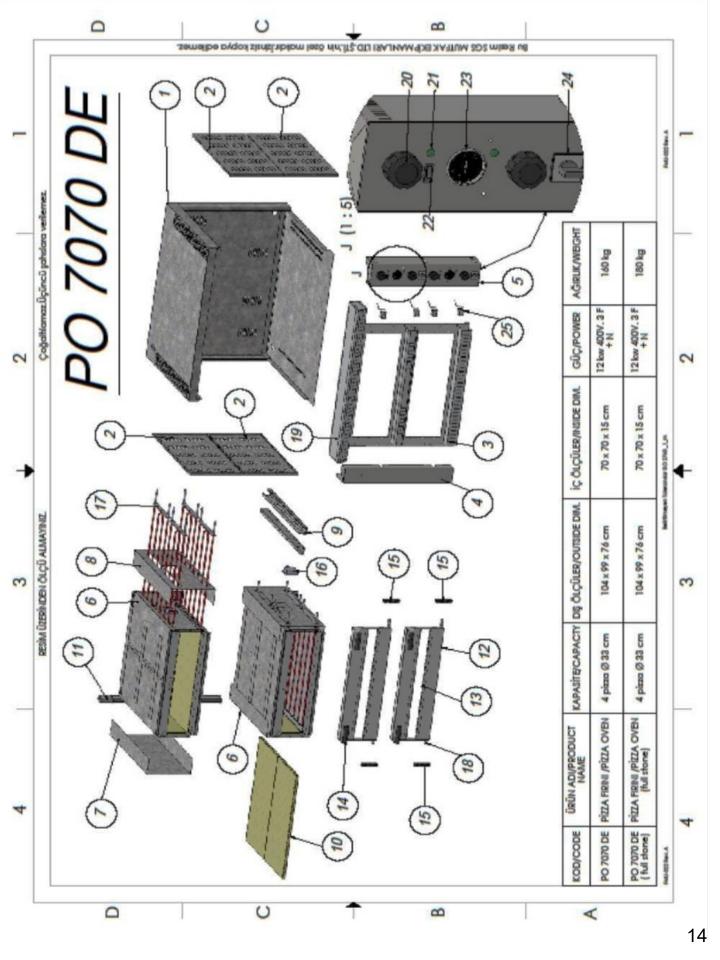

PO 7070 DE SPARE PART LIST

CODE	PART NAME
1	BODY
2	RIGHT-LEFT SHEETS
3	FRONT FRAME
4	LEFT POST
5	CONTROL PANEL
6	DECK BODY
7	ISOLATION HOLDER (RIGHT)
8	ISOLATION HOLDER (LEFT)
9	RESISTANCE HOLDER
10	COOKING STONE
11	CHIMNEY
12	DOOR
13	SURVEILLANCE GLASS
14	DOOR HANDLE
15	DOOR SHAFT BUSH
16	COOKING AREA LAMP
17	RESISTANCE
18	DOOR HINGE SHAFT
19	PADDLE BOX
20	THERMOSTAT SWITCH
21	THERMOSTAT LED
22	LAMP SWITCH
23	THERMOMETER
24	PAKO SWITCH
25	THERMOSTAT



DECLARATION OF CONFORMITY

COMPANY NAME : SGS MUTFAK EKIPMANLARI İTH.İHR.TUR.GIDA PAZ. ELEK. SER. HİZ.

SAN. ve LTD. ŞTİ.

ADDRESS : Cumhuriyet Mah Balkan Cad No: 20 Yazıbaşı Torbalı İzmir Türkiye

PHONE : 0090 232 2575233 - 2575223 - 2576922 - 2575836

FAKS : 0090 232 2575303

WEB : http://www.sgsoven.com

PRODUCT : Pizza Oven

MODEL : PO 5050DE- PO 5252DE-PO 6262DE-PO 6868DE- PO 6292DE-

PO 9262DE-PO 9292DE-PO 5050E - PO 6262E- PO 6868E- PO 6292E- PO 9292E-PO 9292E-

PO 7070DE -PROFI 10570E- PROFI 10570DE- PROFI 10570TE

TEST STATEMENT NO: 20140528/001

HARMONIZED STANDARDS: EN 60335-2-36, EN 60335-1

APPLIED DIRECTIVES : Low Voltage Directive (LVD) 2014/35/EU

We declare as of SGS MUTFAK EKIPMANLARI LTD. ŞTİ. PIZZA OVEN producted by us is in compliance with the above relevant Council of Europe New Approach Directives and Harmonized EN standards that given. We accept all the responsibilities associated with these products.

PLACE / DATE : iZMiR / 13.10.2014

GENERAL MANAGER:

SEBAHTIN YASHAROV YUZERS WUTFAK EKIPMANLARI ITH HER AKSU

TURIZM GIDA RAZ ELEKTRONIK SERVIS HIZM SAM. TIC. LTD. STI. Yazibaşı Mab. Bağın Cad. Mo. 26 Turbahıl ZMIR Tel: 0232-257 52 23 757.52 33 Fax. 0232 257 53 03 TURBALI VD. 735 028 9108



SGS MUTFAK EKIPMANLARI LTD. STI.

Cumhuriyet Mah. Balkan Cad. No:20 Yazıbaşı-Torbalı/İZMİR-TÜRKİYE

Tel: +90 232 257 52 23 Fax: +90 232 257 53 03

e-mail: info@sgsoven.com www.sgsoven.com