



ÖZTİRYAKİLER

Cumhuriyet Mah.Hadımköy Yolu Cad.No:8

Büyükkçekmece-İstanbul-TURKEY

e-mail: export@oztiryakiler.com.tr

web: www.oztiryakiler.com.tr

code:


700 SERIE

model:

7867.N1.80708.01

ELECTRIC BRATT PAN 50 lt MANUAL TILTING

OTE 50




1,5 mm Top



Flush Top



Heavy Duty

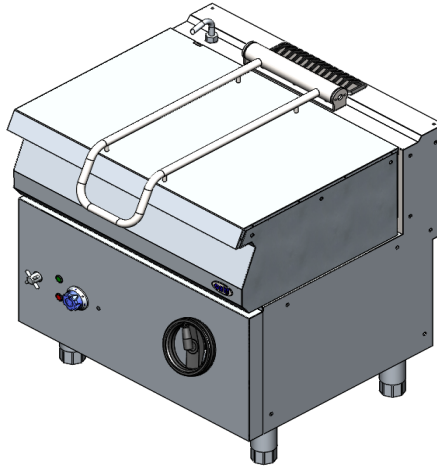

Easy Maintenance



Efficiency



Hygiene

700 SERIE MAIN FEATURES

- * 1.5 mm thick AISI 304 stainless steel laser cut top
- * Flush top setting with secure fixing screws
- * 3 installation options; standalone(fixed on a base w/ or w/o door), cantilever or on concrete plinth
- * Installation gap behind the equipment for plumbing & electrical connections
- * Easy access from front panel to all major components for maintenance
- * Modular system for flexibility

CONSTRUCTION

- * All stainless steel construction to avoid any infiltration
- * Top, sides, back, front panels and control consoles in stainless steel with satin scotch-brite finish
- * Standalone and base units are equipped with heavy duty 150 mm adjustable stainless feet.
- *

ELECTRIC BRATT PAN

- * High grade 8 mm stainless steel thick bottom for corrosion resistance
- * Optional 10 mm thick duomat cooking surface with the combination of 2 different stainless steel for better thermal stability available on request
- * Rounded corners for easy of cleaning
- * Safety system to cut off electricity and heating if the pan is raised
- * Safety thermostat to avoid overheating
- * Thermostatic temperature control between 50-300°C on electric models
- * High quality thermal insulation for limited heat radiation and low energy consumption
- * Double skin lid with counter balanced mechanism for easy opening
- * Manuel wheel-operated or optional electrically controlled tilt mechanism
- * Manuel water refilling
- * Even heat distribution with armored heating elements under the cooking surface on electric models
- * Uniform heat distribution with armored heating elements
- * Automatic power cut off during tilting
- *

OPTIONS

- * Electrically controlled tilting mechanism.
- *

ACCESSORIES

- *
- *
- *
- *

STANDARDS & CERTIFICATES

- * EN 60335-1 European Standard relating to safety of household and similar electrical appliances
- * EN 60335-2-39 European Standard relating to safety of household and similar electrical appliances
- *
- *



**ÖZTİRYAKİLER**

Cumhuriyet Mah.Hadımköy Yolu Cad.No:8

Büyükcçekmece-İstanbul-TURKEY

e-mail: export@oztiryakiler.com.tr

web: www.oztiryakiler.com.tr

code: 7867.N1.80708.01	700 SERIE ELECTRIC BRATT PAN 50 lt MANUAL TILTING	model: OTE 50							
<p>Technical drawings of the electric bratt pan. The top view shows a width of 800 mm and a depth of 661.6 mm. The side view shows a height of 850 mm and a depth of 783 mm. The front view shows a height of 393 mm and a depth of 715 mm. The bottom view shows a width of 68 mm and a depth of 70 mm.</p>									
DIMENSIONS (Net)		DIMENSIONS (Shipping)							
* Width (mm)	800	* Width (mm)							
* Depth (mm)	700	* Depth (mm)							
* Height (mm)	850	* Height (mm)							
* Weight (kg)	104	* Weight (kg)							
*		* Volume (m³)							
COMPOSITION OF TOP									
* Capacity	50	liter							
* Cooking well surface (mm)	700x410								
* Cooking well height (mm)	up to spout:184/max.230								
* Cooking surface (dm2)	25,8								
COMPOSITION OF THE BOTTOM PART									
* * * *									
	GAS								
* Power:	kW	Btu/hr	kcal	Gas Inlet:					
* G20	Pressure:		m³/h						
* G30/G31	Pressure:	mbar	kg/h						
* G30	Pressure:								
	ELECTRICITY								
* Power:	7,5	kW							
* Supply Voltage:	400 V / 3 NPE 50/60 Hz	230 V / 3 PE 50/60 Hz							
* Protection Class:	IP	21							
	WATER-IN								
* Cold Water Inlet:	3/4"	Pressure (min-max)	1,5-6	bar	150-600	kPa	Temperature (min-max)	5-60	°C
* Hot Water Inlet:	3/4"								
* Hardness:	0-10	F							
	DRAIN								
* *									