



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

MOVIE "63dB"

ABS

COLLECTION SILENCER



TECHNICAL CHARACTERISTICS 0-500gr/3' Max 4Kg

Voltage: 230V / 220V / 110V

Frequency: 50Hz / 60Hz

Phases: 1(monophase)

RPM: 1.300 / 1.600

Current: 2,1A / 4,7A

Capacitor: 14nf / 55nf

Power: 0,37Hp / 497W

Protection rating: IP21

Motor supplied with thermal protector

Maximum operating time: 30 min.

Tempered steel grinding wheel (62HRC) ø 65mm

Lifespan of grinding wheels: 500kg

Hopper capacity: 1,5kg

Doser capacity: 600g

Doser regulation: 5/12g

Doser lever: right/left

Stop/start standard version: automatic

Dimensions width x length x height: 270x460x630mm


Weight: 13kg

Air noise: 63dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRC) ø 65mm.

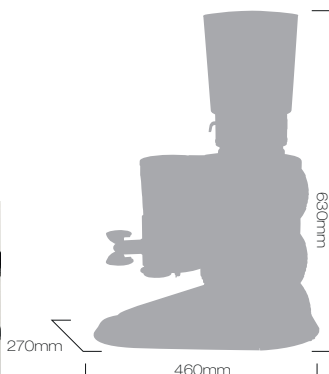

GREY

DARK GREY

BLACK

PURPLE



MAIN ATTRIBUTES

Hopper (1.5kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. Micrometric regulation of the coffee grind using a regulatory pawl. New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). Bodywork manufactured in anti-scratch material, in a single piece (less vibrations, more robustness). With ventilation system (internal air inlet and outlet). Large tray integrated into the body, ready to take knocks (portafilter). Single-bodied, hermetically sealed doser without aroma loss, vibrationless and made of unbreakable material. Ergonomic handle. Universal coffee tamper (rotatable). Doser fitted with gasket-saver (portafilter positioner). Hardened steel grinding blades (62/65HRC) 65mm in diameter. Motor assembly with anti-vibration system. Silencer motor with internal autoventilation, 63dB.

Optional: Left- or right-handed doser lever. Coffee counter. Optional personalisation system with chrome plates on the doser and on the rear of the bodywork. Optionally we can fit it with a "high Production" motor (0,47Hp/597W).

